

# Specialty Chemical Measurement Solutions

Superior flow and density measurement



Best-in-class measurement

# “The batch reactor is the workhorse of my specialty chemical industry. Better control would improve my operation.”

Specialty chemical companies are under increasing pressure to produce a wider range of differentiated products, quickly, at a better profit margin from the same assets with fluctuating feedstock and energy costs, while meeting safety and environmental mandates, sustainability and eco-practices. Increasing flexibility, reliability and visibility while decreasing batch cycle times can help increase throughput, lower costs, and improve time-to-market, boosting your global competitiveness.



## What if you could ...

### Produce every batch right every time, with increased operational flexibility to satisfy even low-volume and seasonal demand, while reducing off-spec product, waste and rework?

- ✓ Direct mass measurement over wide turndowns and varying fluid properties, with onboard, real-time concentration measurement assures precise, repeatable and reproducible batch chemistry
- ✓ Cycle times are improved with Coriolis independence from fluid properties—this means that Coriolis meters are immune from frequently changing raw materials and widely varying flow rates
- ✓ Two-phase flow measurement ability increases batch chemistry accuracy, which is ideal for increasing product customization for differentiated markets
- ✓ Onboard, in-line meter verification for troubleshooting and calibration checks for facilitating batch traceability

### Simultaneously increase scale-up, production and plant up-time, while lowering operation and maintenance costs?

- ✓ Facilitate first-to-market by using the same Coriolis technology as new product development moves from research and development through pilot plant to full production
- ✓ Improved customer service and responsiveness to changing market requirements in recipes and formulations
- ✓ Direct mass measurement eliminates the cost and maintenance of calibration factor changes, re-ranging equipment, and reduces the number of instruments which must be validated in the process
- ✓ Digital protocols allows efficient communication to PLC and packaging equipment

### Assure the health and safety of my employees and community, and meet environmental mandates?

- ✓ Coriolis is inherently well-suited to toxic or hazardous chemicals with dramatically fewer leak points compared to traditional flow technologies
- ✓ Check existing meters in-line to assure they are safe and compliant
- ✓ Conduct process validation and SIS-proof tests while the process is running with meter in-situ
- ✓ Online concentration measurement, eliminating sample ports and potential operator exposure to hazardous chemicals, and faster product quality feedback as compared to lab analysis
- ✓ Hygienic approvals by 3-A and EHEDG, ISO-17025 accredited calibration reference systems





Process plant designers, engineers and operators worldwide are choosing Micro Motion® and Rosemount® measurement technologies to increase batch quality and reproducibility, reduce maintenance, improve safety and environmental compliance, reduce cycle time, and accurately measure fluids bought and sold.

- Measure mass and density directly over wide turndowns and changing fluid properties with a single precision multivariable device, eliminating complex inferred mass calculations – ideal for batch chemistry applications.
- Reduced maintenance due to no wearing parts.
- Determine real-time, in-line density and concentration of the fluid. No sampling!
- Improve safety via reduced leak points, elimination of impulse lines, sample points, and reduce the removal and cleaning of meters for periodic calibration.
- Meet meter verification and SIS-proof tests with in-situ meter verification.
- Highly repeatable and reproducible measurements.
- Compliant with NAMUR NE132.

### Research and Development, Pilot Plant

- Flow and density technology scales up to production
- Ideal technology for batch chemistry research
- Low flow measurement to gram/hour range



### Reactor Feed

- High accuracy additions of reactants and catalysts
- Batch-from-empty
- Batch traceability
- Shortened cycle time
- Shear sensitive fluids



### Filling


- High-speed precision filling and dosing
- Hygienic, fast and easy clean-in-place allows rapid change over
- Facilitates quality control





## Calibration Cart

- ISO 9001/17025 traceable
- Smart Meter Verification

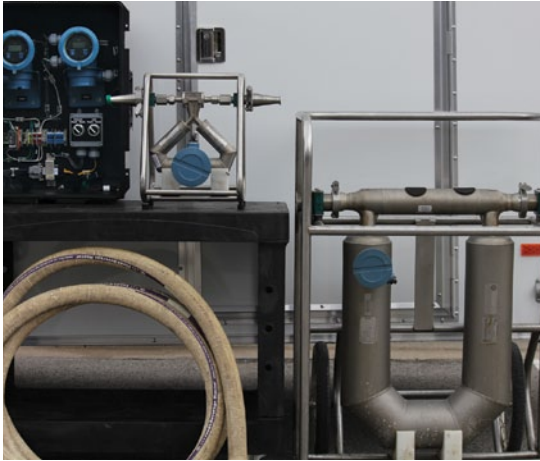

State-of-the-art global ISO/IEC17025 calibration facilities uniquely calibrate meters for both mass and density offering best measurement uncertainties of  $\pm 0.014\%$

## Calibration/Metrology Approvals



## Compliant with domestic and international standards

- Metrology (OIML R117/R137, NTEP, Measurement Canada)



- Sanitary codes (ASME BPE, FDA, EHEDG, 3-A)



- Industry standards (API, NAMUR, PED, CRN, Dual Seal, ASME B31.3/B31.1)



## Specialty Chemical Applications:


- Batching & blending
- Reactor feed, catalyst addition
- Chemical recovery
- Custody transfer, product load-out
- Density/Concentration
- Mass balance
- Control of crystallizers, distillation
- Melt & polymer processing
- Nano-materials
- Safety shutdown
- Research & development, pilot-plant scale-up
- Drum & tote filling
- High-speed filling
- CIP, SIP system monitoring
- Batch traceability
- Coatings, emulsions, suspensions
- Portable master meter ISO verification
- Purge & blanketing gases
- Chilled water systems

# Micro Motion® and Rosemount® Flow and Density Meters



## Micro Motion® ELITE® Coriolis Flow and Density Meters

Flow range	0.01 to 120,000 lb/min (0.35 – 3,266,000 kg/hr)
Liquid mass flow accuracy	±0.05% or ±0.1%
Liquid volume flow accuracy	±0.05% or ±0.1%
Gas flow accuracy	±0.25% or ±0.35%
Liquid density accuracy	±0.2 kg/m <sup>3</sup> , ±0.5 kg/m <sup>3</sup> or ±2.0 kg/m <sup>3</sup>
Nominal line size	1/12" to 16" (2 to 400 mm)

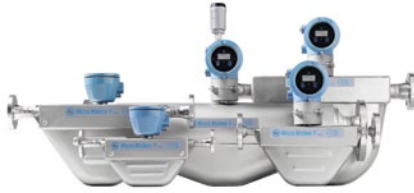

## Micro Motion® F-Series Coriolis Flow and Density Meters

Flow range	6.5 to 10,000 lb/min (180 to 272,000 kg/hr)
Liquid mass flow accuracy	±0.10%, ±0.15% or ±0.20%
Liquid volume flow accuracy	±0.15% or ±0.30%
Gas flow accuracy	±0.50%
Liquid density accuracy	±0.5 kg/m <sup>3</sup> , ±1.0 kg/m <sup>3</sup> or ±2.0 kg/m <sup>3</sup>
Nominal line sizes	¼" to 4" (6 to 100 mm)



## Micro Motion® T-Series Coriolis Meters

Flow range	3 to 3200 lb/min (82 to 87,000 kg/h)
Liquid mass flow accuracy	±0.15%
Liquid volume flow accuracy	±0.25%
Gas flow accuracy	±0.50%
Liquid density accuracy	±0.002 g/cm <sup>3</sup> (±2.0 kg/m <sup>3</sup> )
Nominal line size	¼" to 2" (6 to 50 mm)



## Micro Motion® FDM (Fork Density Meter)

Density accuracy	±0.1 kg/m <sup>3</sup> (±0.001 g/cc)
Density range	0-3000 kg/m <sup>3</sup> (0-3 g/cc)



## Micro Motion® Filling Mass Transmitter

Compact, integral, high-speed filling
Fills to <1 second
Automatic overshoot compensate
Compatible with ELITE CMFS, F-Series



## Rosemount® 8800 Vortex Flowmeter

Liquid flow accuracy	±0.65%
Gas flow accuracy	±1.0%
Saturated steam mass flow accuracy	±2.0%
Nominal line size	0.5" to 12" (12 to 300 mm)



## Rosemount® 8700 Magnetic Flowmeter

Liquid flow accuracy	±0.15%
Nominal line size	0.15" to 48"



EMERSON WORLD-LEADING  
FLOW AND DENSITY  
technology

SETS THE STANDARD FOR  
RELIABLE, REPEATABLE,  
HIGH PERFORMANCE  
MEASUREMENT



Emerson's Micro Motion and Rosemount devices are known globally in over 85 countries for quality, reliability, application expertise, and support not available elsewhere.



©2015 Emerson Process Management. All rights reserved. The Emerson logo is a trademark and service mark of Emerson Electric Co. DeltaV is a mark of one of the Emerson Process Management family of companies. All other marks are the property of their respective owners.

**Emerson Process Management  
Americas**

7070 Winchester Circle  
Boulder, Colorado USA 80301  
T: 800 522 6277  
T: +1 (303) 527 5200  
F: +1 (303) 530 8459

[www.MicroMotion.com](http://www.MicroMotion.com)  
[www.Rosemount.com](http://www.Rosemount.com)

Mexico T: 52 55 5809 5300  
Argentina T: 54 11 4837 7000  
Brazil T: 55 15 3413 8000  
Venezuela T: 58 26 1300 8100

**Emerson Process Management  
Europe/Middle East**

Central/Eastern Europe T: +41 41 7686 111  
Dubai T: +971 4 811 8100  
Abu Dhabi T: +971 2 697 2000  
France T: 0800 917 901  
Germany T: 0800 182 5347  
Italy T: 8008 77334  
The Netherlands T: +31 70 413 6666  
Belgium T: +32 2 716 77 11  
Spain T: +34 913 586 000  
U.K. T: 0870 240 1978  
Russia/CIS T: +7 495 981 9811

**Emerson Process Management  
Asia Pacific**

Australia T: (61) 3 9721 0200  
China T: (86) 21 2892 9000  
India T: (91) 22 6662 0566  
Japan T: (81) 3 5769 6803  
South Korea T: (82) 2 3438 4600  
Singapore T: (65) 6 777 8211

For a complete list of contact information and websites, please visit: [www.emersonprocess.com/home/contacts/global](http://www.emersonprocess.com/home/contacts/global)



**EMERSON**  
Process Management