

Power Plant Reduces Safety Risks with Direct Switch Technology

RESULTS

- Reduced safety risks
- Lowered operations and maintenance costs
- Minimized the risk of overfill

APPLICATION

Fly ash level measurement

Application Characteristics: 44-ft. (13 m) high dusty silo, heavy, and has low dielectric

CUSTOMER

Coal fired power plant in the United States

CHALLENGE

This coal fired power plant had a problem monitoring the levels of fly ash in their storage silo. The monitoring is used to prevent overfill of their fly ash silo and the rail cars that distribute this by-product to users.

This customer used a mechanical drop weight level indicator to get the measurement three times a day. This mechanical measurement required frequent repair work due to malfunctioning moving parts. When the mechanical measurement failed, operators had to take manual measurements.

This measurement method exposed the operator to fly ash inhalation and safety risks related to climbing the silo. It required valuable operations time while only providing a measurement two to three times daily. Additionally, this customer experienced increased risk associated with overfilling and the clean-up costs.


The customer also tried a non-contacting radar transmitter. This measurement did not provide a sufficient signal return due to the slope of the fly ash surface.

SOLUTION

The Rosemount 5303 Guided Wave Radar with a single flex probe was installed. The measurement quality of the Rosemount 5300 series is not affected by dusty environments, long distances, and low dielectric because it has Direct Switch Technology. Also, the long stud option on the flexible probe helped minimize the influence of the nozzle at the top of the tank.



The Rosemount 5300 provided a convenient and reliable means to directly monitor fly ash level from the control room.

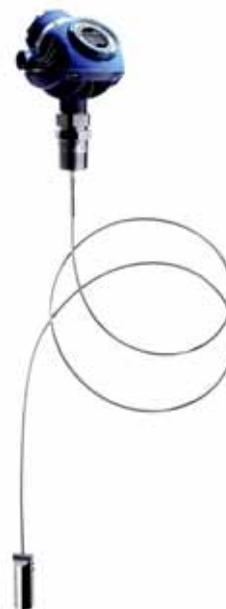

The Rosemount 5300 Guided Wave Radar with a Flexible Lead Probe.

ROSEMOUNT[®]

For more information:
www.rosemount.com


EMERSON[™]
Process Management

Operators can now monitor the fly ash level from the control room without having to climb the silo, which eliminated the safety risks associated with manual measurements and reduced operations and maintenance costs. Continuous and reliable measurement from the Rosemount 5300 also minimized the risk of overfill and clean up costs.

RESOURCES

Rosemount 5300

<http://www.emersonprocess.com/rosemount/products/level/m5300b.html>

Rosemount 5300 Technical Note

<http://www.emersonprocess.com/rosemount/document/notes/00830-2300-4811.pdf>

The Emerson logo is a trade mark and service mark of Emerson Electric Co. Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc. All other marks are the property of their respective owners.

Standard Terms and Conditions of Sale can be found at www.rosemount.com/terms_of_sale

Emerson Process Management

Rosemount Division
8200 Market Boulevard
Chanhassen, MN 55317 USA
T (U.S.) 1-800-999-9307
T (International) (952) 906-8888
F (952) 949-7001
www.rosemount.com

Emerson Process Management

Blegistrasse 23
P.O. Box 1046
CH 6341 Baar
Switzerland
Tel +41 (0) 41 768 6111
Fax +41 (0) 41 768 6300

Emerson FZE

P.O. Box 17033
Jebel Ali Free Zone
Dubai UAE
Tel +971 4 811 8100
Fax +971 4 886 5465

Emerson Process Management

Emerson Process Management Asia Pacific
Private Limited
1 Pandan Crescent
Singapore 128461
T (65) 6777 8211
F (65) 6777 0947
Enquiries@AP.EmersonProcess.com

ROSEMOUNT[®]

For more information:
www.rosemount.com


EMERSON[™]
Process Management